

ABS05 THRU ABS10

ABS 1.0 AMP Plastic-Encapsulate Bridge Rectifier

ABS Plastic-Encapsulate Bridge Rectifier

Features

- Ideal for printed circuit board
- Small size, simple installation
- High surge current capability
- Reliable low cost construction utilizing molded plastic technique
- High temperature soldering guaranteed: 260/10 seconds at 5lbs., (2.3kg) tension



Applications

General purpose 1 phase Bridgerectifier applications

Mechanical Data


- Case: ABS
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end

Function Diagram



Reverse Voltage
50-1000 V
Forward Current
1.0 Ampere

ABS



Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	ABS05	ABS1	ABS2	ABS4	ABS6	ABS8	ABS10
Device marking code			ABS05	ABS1	ABS2	ABS4	ABS6	ABS8	ABS10
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	50	100	200	400	600	800	1000
Maximum RMS Voltage	V_{RMS}	V	35	70	140	280	420	560	700
Maximum DC blocking Voltage	V_{DC}	V	50	100	200	400	600	800	1000
Maximum Average Forward Rectified Current @60Hz sinewave, Resistance load, TL (Fig.1)	$I_{F(AV)}$	A	1.0						
Non-repetitive Peak Forward Surge Current @ t=8.3ms Half-sine wave	I_{FSM}	A	30						
Rating for fusing (t=8.3ms, Ta=25 °C)	I^2t	A ² S	3.7						
Storage temperature	T_{stg}	°C	-55 ~ +150						
Junction temperature	T_j	°C	-55 ~ +150						
Typical Thermal Resistance	$R_{\theta J-A}$	°C /W	75						
	$R_{\theta J-L}$	°C /W	18						





ABS05 THRU ABS10

ABS 1.0 AMP Plastic-Encapsulate Bridge Rectifier

● **Electrical Characteristics** (Ta=25°C Unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	ABS05	ABS1	ABS2	ABS4	ABS6	ABS8	ABS10
Maximum instantaneous forward voltage	$I_F=0.4A$	V_F	V	1.0						
Maximum DC reverse current at rated DC blocking voltage	$V_R=V_{DC}, T_A=25^{\circ}C$	I_{R1}	μA	5.0						
	$V_R=V_{DC}, T_A=100^{\circ}C$	I_{R2}		500						
Typical junction capacitance	4.0V DC, 1MHz	C_J	pF	12						

● **Ratings And Characteristics Curves** (Ta=25°C Unless otherwise specified)

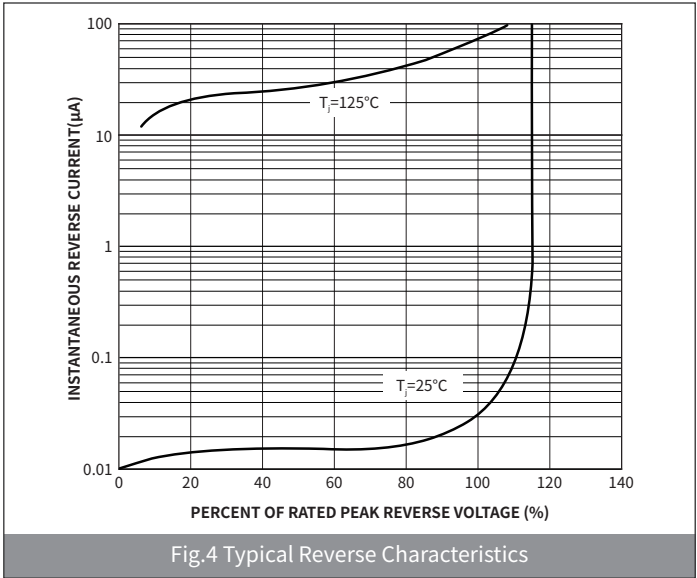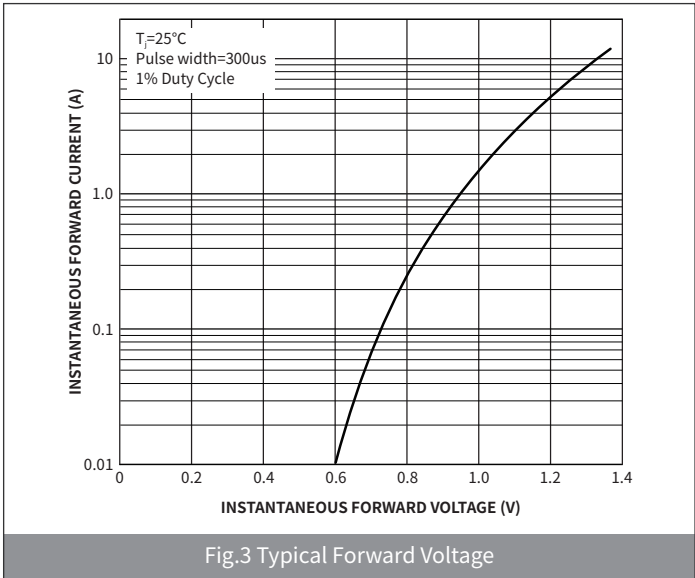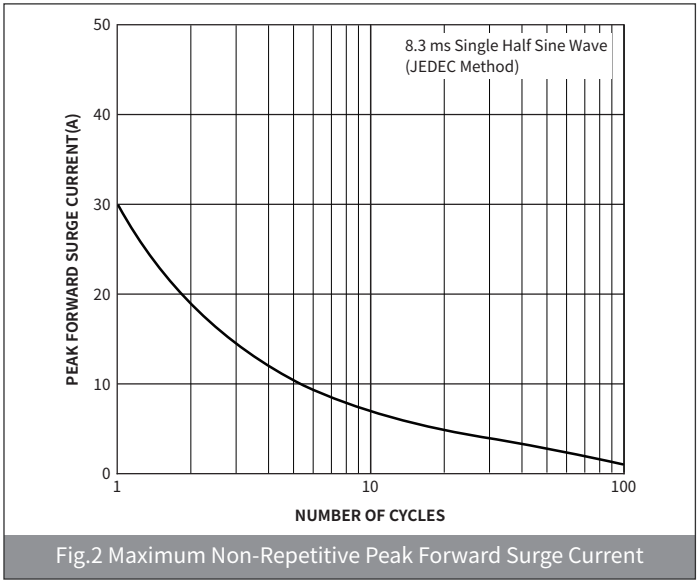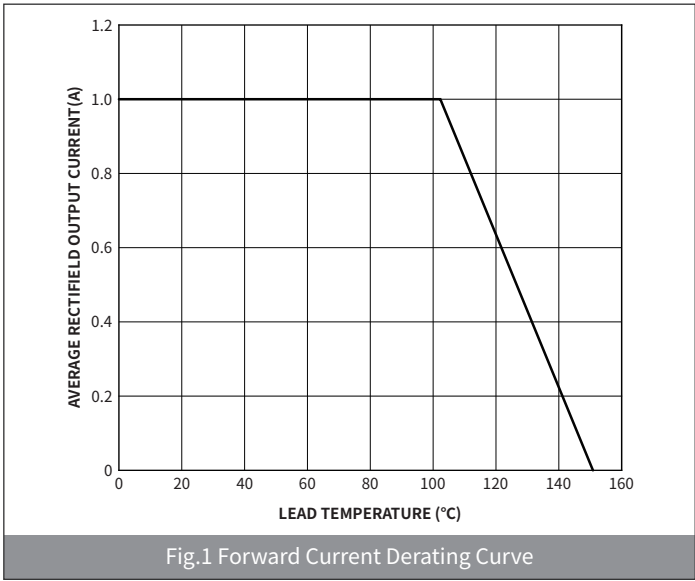

ABS05 THRU ABS10

ABS 1.0 AMP Plastic-Encapsulate Bridge Rectifier

Ordering Information

PACKAGE	PACKAGE CODE	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
ABS	R3	5000	10000	100000	13"

Package Outline Dimensions (ABS)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	1.25	1.45	0.049	0.057
A1	-	0.2	-	0.008
B	3.9	4.1	0.126	0.141
B1	0.5	0.8	0.02	0.031
C	0.15	0.35	0.006	0.014
D	4.8	5.1	0.197	0.201
E	4.2	4.6	0.165	0.181
F	0.3	0.8	0.012	0.031
G	6.2	7.0	0.244	0.275

Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
M	5.72	5.9	0.225	0.232
N	4.0	4.2	0.157	0.165
Y	1.0	1.2	0.039	0.047
X	0.9	1.1	0.035	0.043