




FH201-13

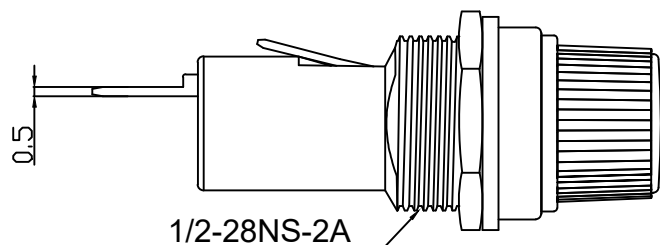

Fuse holder for overload protection

Screw-in mounting

Rating: 10A 250VAC (UL,CUL)
15A 250VAC(TUV)



Fuse:Ø6.0x30mm

Cap:Screw type

Panel thickness:4.5mm max



Operating Temperature:0°C~+85°C

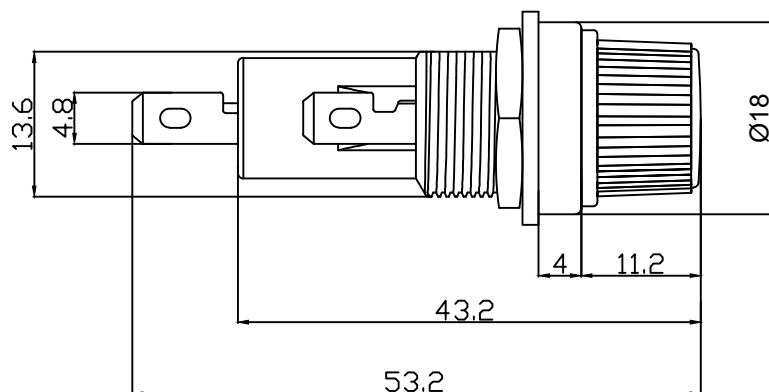

CUT-OUT




MATERIAL:

Housing:PBT,UL rated 94V0

Bayonet:PBT,UL rated 94V0

Terminal:Brass,silver or tin plated

Nut:Brass,Ni plated



				公差 TOLERANCES		.X±0.3 .XX±0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
				版本: VERSION	A3	比例尺 SCALE	1:1	日期 DATE	2025.07.17	品名 TITLE	图号 DRAWING NO
A3	重新整理发行	2025.07.17	N/A	核准		核对	Z. H. B.	绘图		FH201-13	FH201-13_A3
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO	APPROVED BY		CHECKED BY		DRAWN BY			